



GV・GVH (40t・45t)

GV-40, GVH-40

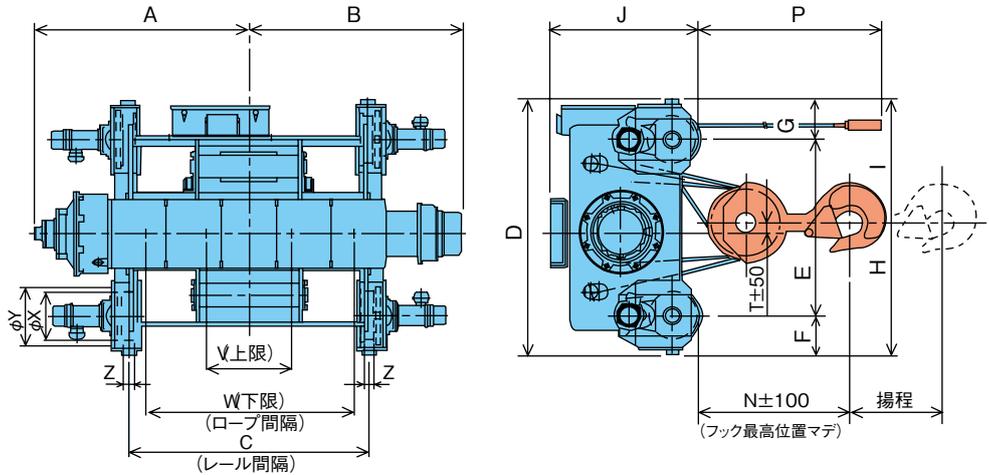

GV-45, GVH-45

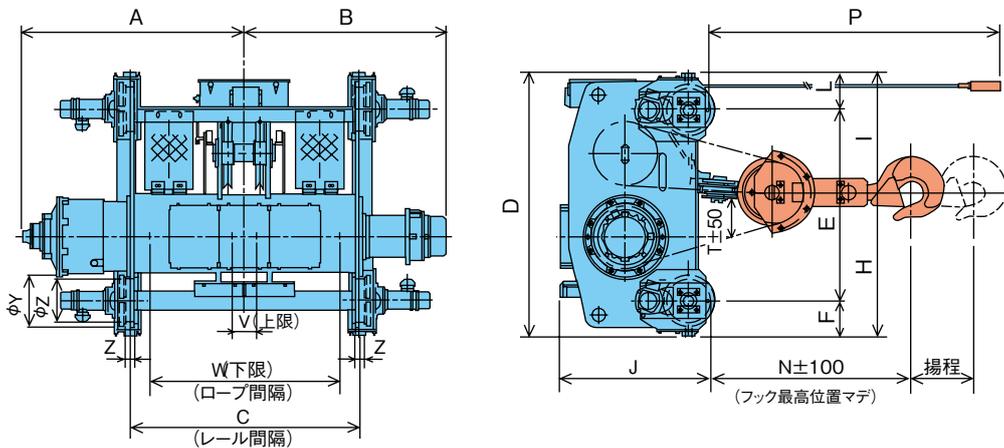

形名	GV-40		GV-45		GVH-40		GVH-45		
	WM	WHM	WHM	WSM	WM	WHM	WHM	WSM	
容量 (t)	40		45		40		45		
揚程 (m)	6.5	11.5	12.5	19	6.5	11.5	12.5	19	
概略寸法 (mm)	A	1525	1875	1740	2090	1525	1875	1740	2090
	B	1515	1865	1565	1915	1635	1985	1685	2035
	C	1700	2400	1780	2480	1700	2400	1780	2480
	D	1874		2114		1874		2114	
	E	1300		1540		1300		1540	
	F	287		287		287		287	
	G	287		287		287		287	
	H	968		1170		968		1170	
	I	906		944		906		944	
	J	1055		1200		1055		1200	
	N	1110		1600		1110		1600	
	P	7500	12500	14000	20500	7500	12500	14000	20500
	T	81		363		81		363	
	V	602		196		602		196	
	W	1485	2164	1476	2141	1485	2164	1476	2141
X	350		350		350		350		
Y	419		419		419		419		
Z	75		75		75		75		
概略質量 (kg)	5000	5500	6200	6700	5100	5600	6300	6800	
フックブロック質量 (kg)	640		590		640		590		
適用レール	37kgレールまたは65mm角鋼		37kgレールまたは65mm角鋼		37kgレールまたは65mm角鋼		37kgレールまたは65mm角鋼		