
ダブルレール形




(7.5t·10t·15t·20t·30t)

G2-7.5·10·15·20

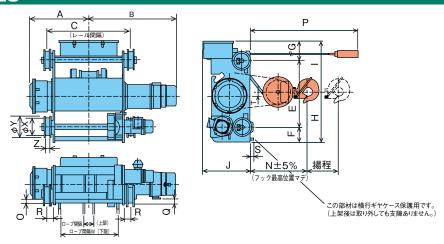

G2-30

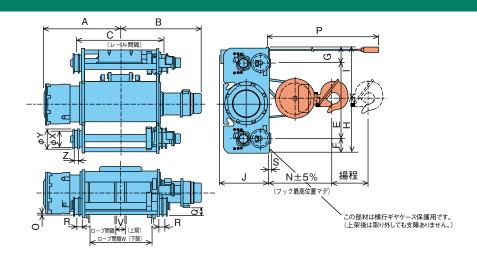

形名		G2-7.5		G2-10		G2-15		G2-20	G2-30
		WM	WHM	WM	WHM	WM	WHM	WHM	WHM
容 量(t)		7.5		10		15		20	30
揚	程(m)	8	12	8	12	8	12	12	12
	Α	722	847	772	897	852	1002	1052	1262
	В	1004	1129	959	1084	1085	1235	1235	1285
	С	950	1200	950	1200	1000	1300	1300	1400
	Е	760		840		1000		1045	1190
	F	170		170		220		220	220
	G	223		233		243		248	246
	Н	570		613		760		790	850
概	I	58	33	63	80	70	03	723	802
略寸	J	543		543		743		748	763
	N	630		710		860		910	1020
法	0	40		38		30		32	15
法	Р	8000	12000	8000	12000	8000	12000	12000	12000
(mm)	Q	75		30		85		120	115
	R	77		82		84		84	89
	S	45		55		55		55	45
	Т	50		53		70		70	80
	V	105	80	100	100	110	135	125	150
	W	660	910	620	870	660	960	945	990
	Х	190		190		250		250	250
	Υ	225		225		285		285	285
	Z	52		52		58		58	73
概略質	量 (kg)	900	980	1250	1360	1900	2100	2500	3600
フックブロック質量 (kg)		80		100		190		280	380
適用レール			15kgレールま	とは44mm角鋼		22kgレールまたは50mm		n角鋼	37kgレールまたは65mm角鋼